




FS23M Dual Failsafe Spacesaver™ Bolt Locks



FS23M

- Dual Fail Safe Electric Bolt-Lock
- Adjustable Auto-Relock Switch(Ball Sensor)
- Auminum Face Plate Ensures
- Power Source : 0.6A@12VDC Continuous
- Dimensions :
 - > 203.2(L)x38.1(W)x38.1(D)mm(Bolt Lock)
 - > 203.2(L)x38.1(W)x3.175(D)mm(Face Plate)
 - > 101.6(L)x38.1(W)x3.175(D)mm(Strike)



Electric Strike



2081EJ

- 斷電開門電鎖口
- 適合木門及不銹鋼門使用
- 尺寸 :146(L)x25(W)30(D)mm
- 工作電壓及電流 :DC12V/140mA



2082GL

- 斷電開門玻璃門電鎖口
- 適合 12mm 玻璃門使用
- 尺寸 :148(L)x28(W)31(D)mm
- 工作電壓及電流 :DC12V/250mA



OC-3003

- 斷電開門電鎖口 (明裝設計)
- 適合木門及不銹鋼門使用
- 尺寸 :149(L)x28(W)32(D)mm
- 工作電壓及電流 :DC12V/120mA



934

- 斷電開門玻璃門電鎖口
- 適合 12mm 玻璃門使用
- 尺寸 :130(L)x22(W)31(D)mm
- 工作電壓及電流 :DC12V

Magnetic Door Holder



DZ828

- 60KG 磁力鎖 (防煙門磁吸)
- 牆壁安裝 (地面安裝需自行調整)
- 吸板可調角度 :Max.45°
- 尺寸 :65(L)x65(W)x88(H)mm
- 工作電壓 :DC12V/24V

Solenoid

SL-102

- 迷你型電鎖
- 尺寸 :55x35x40mm



SL-100

- 迷你型電鎖 / 線圈
- 尺寸 :50x25x20mm



SL-101

- 迷你型電鎖 / 線圈
- 尺寸 :40x28x28mm



Cabinet Lock

EC-C2000-290

- 小型電插鎖 (有電開啓)
- 適用於抽屜, 飾櫃, 衣櫃及各類型文件櫃等
- 3種不同方向安裝模式
- 工作電壓 :DC12V/300mA
- 尺寸 :82(H)x28(W)x30(D)mm



LCJ

1049-10

- 小型櫃門電磁鎖 DC12/24V
- 通電或斷電上鎖模式
- 適用於抽屜, 飾櫃, 衣櫃及各類型文件櫃等
- 工作電壓 :DC12/24V
- 尺寸 :42(H)x48(W)x20(D)mm



ASSA

Fail Safe Electric Bolt-Lock

CHC-10


- Adjustable Auto-Relock Switch(Ball Sensor)
- Aluminum Face Plate Ensures
- Power Source: DC12V/800(650)mA
- Dimensions: 205(L)x32(W)x41(D)mm

CHC-11

- Magnetic Sensor & Timer Delay
- Aluminum Face Plate Ensures
- Power Source: DC12V/900(300)mA
- Dimensions: 200(L)x32(W)x41(D)mm



* Optional Accessory



MBK-U01

- U Type Mounting Bracket
- For 12mm Full Glass Door

Electric Strike



CHC-01 (Fail-Secure)


CHC-02 (Fail-Safe)

- Wooden or Metal Frames Door Use
- Dimensions: 150(L)x38(W)33(D)mm
- Power Source: DC12V / 250mA



CHC-01A (Fail-Secure)

- Wooden or Metal Frames Door Use
- Dimensions: 250(L)x25(W)32(D)mm
- Power Source: DC12V / 250mA

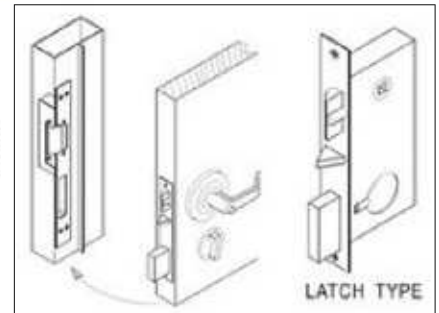

Electric Strike (Glazed Door)



CHC-06 (Fail-Safe)

- For 12~15mm Full Glass Door
- Power Source: DC12V / 250mA
- Dimensions: 160(L)x24(W)31(D)mm

Full Glass Door

Deadlatch



CHC-03A

- For Metal Door Use(11/8")
- With Cylinder & Thumbturn

CHC-03B

- For Wooden Door Use(11/2")
- With Cylinder & Thumbturn

* Optional Accessory



CR-01

- Aluminum Cylinder Ring
- Dimensions: Size:44.3x5mm


Magnetic Lock



CHC-14 (Fail-Safe)


- 250kg Surface Mount
- Dimensions: 250(L)x43(W)25(D)mm
- Power Source: DC12V / 420mA, DC24V / 210mA

* Optional Accessory




MBK-U02

- U Type Bracket
- For 12mm Glass Door



MBK-100

- Z Type Bracket
- For In-Swinging Door

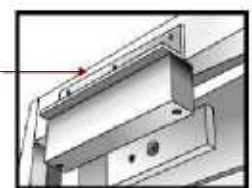

MBK-10001

- L Type Bracket
- For Narrow Frames